

TEST REPORT
IEC 60598-2-3
Luminaires
Part 2: Particular requirements
Section 3: Luminaires for road and street lighting

Report Number.: PRMS2504338-01SR
Date of issue: 2025-04-24
Total number of pages: **42 pages**

Name of Testing Laboratory preparing the Report: ShenZhen Promise Test Technology Co., Ltd.

Applicant's name: Zhongshan Kerisheng supply chain Management Co., LTD
Address: Card 04, 33rd Floor, Lihe Commercial Center, 98 Tongxing Road, Guzhen Town, Zhongshan City

Test specification:

Standard: IEC 60598-2-3:2002, IEC 60598-2-3:2002/AMD1:2011 used in conjunction with IEC 60598-1:2020
 EN 60598-2-3:2003 + A1:2011 used in conjunction with EN IEC 60598-1:2021 + A11:2022

Test procedure: Test report

Non-standard test method: N/A

TRF template used: IECEE OD-2020-F1:2023, Ed.1.6

Test Report Form No.: IEC60598_2_3M


Test Report Form(s) Originator: Intertek Semko AB

Master TRF: Dated 2021-11-01

Copyright © 2024 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : LED street lamp

Trade Mark(s) : 

Manufacturer : Same as applicant

Model/Type reference : See "General product information and other remarks"

Ratings : See "General product information and other remarks"

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	Testing Laboratory:	ShenZhen Promise Test Technology Co., Ltd.
Testing location/ address :		103, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
<input type="checkbox"/>	Associated Testing Laboratory:	
Testing location/ address :		
Tested by (name + signature) :		Felix Ding <i>Felix Ding</i>
Approved by (name + signature) :		Kind Yang <i>Kind. Yang</i>
<hr/>		
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1:	
Testing location/ address :		
Tested by (name + signature) :		
Approved by (name + signature) :		
<hr/>		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2:	
Testing location/ address :		
Tested by (name + signature) :		
Witnessed by (name + signature) :		
Approved by (name + signature) :		
<hr/>		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4:	
Testing location/ address :		
Tested by (name + signature) :		
Witnessed by (name + signature) :		
Approved by (name + signature) :		
Supervised by (name + signature)..... :		

List of Attachments (including a total number of pages in each attachment):	
Attachment 1: Photos	
Summary of testing:	
Tests performed (name of test and test clause): IEC 60598-2-3:2002, IEC 60598-2-3:2002/AMD1:2011 used in conjunction with IEC 60598-1:2020 EN 60598-2-3:2003 + A1:2011 used in conjunction with EN IEC 60598-1:2021 + A11:2022	Testing location: ShenZhen Promise Test Technology Co., Ltd. 103, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Summary of compliance with National Differences:	
List of countries addressed	
<input checked="" type="checkbox"/> N/A	
Use of uncertainty of measurement for decisions on conformity (decision rule) :	
<input type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").	
<input checked="" type="checkbox"/> Other: ... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)	
Information on uncertainty of measurement:	
The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.	
IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.	
Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

LED street lamp

Input: 100-277V~ 50/60Hz Max. 200W

Model: LD-01U-0200-01A

ta: 40°C IP67



Zhongshan Kerisheng supply chain Management Co., LTD.

MADE IN CHINA

Test item particulars					
Classification of installation and use: Fixed, Class I					
Supply Connection: Supply cord					
Possible test case verdicts:					
- test case does not apply to the test object.....: N/A					
- test object does meet the requirement.....: P (Pass)					
- test object does not meet the requirement.....: F (Fail)					
Testing:					
Date of receipt of test item: 2025-04-10					
Date (s) of performance of tests: 2025-04-10 to 2025-04-24					
General remarks:					
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.					
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.					
When differences exist; they shall be identified in the General product information section.					
Name and address of factory (ies): Same as applicant					
General product information and other remarks:					
The maximum operation temperature is 40 °C.					
Product description:					
Input: 100-277V~ 50/60Hz					
No.	Model No.	Power	No.	Model No.	Power
1	LD-01U-0050-01A	50W	22	LD-11V-0050-01A	50W
2	LD-01U-0100-01A	100W	23	LD-11V-0100-01A	100W
3	LD-01U-0150-01A	150W	24	LD-11V-0150-01A	150W
4	LD-02U-0050-01A	50W	25	LD-11V-0200-01A	200W
5	LD-02U-0100-01A	100W	26	LD-12V-0030-01A	30W
6	LD-02U-0150-01A	150W	27	LD-12V-0050-01A	50W
7	LD-02U-0200-01A	200W	28	LD-13V-0060-01A	60W
8	LD-02U-0050-01B	50W	29	LD-13V-0100-01A	100W
9	LD-02U-0100-01B	100W	30	LD-13V-0150-01A	150W
10	LD-02U-0150-01B	150W	31	LD-15V-0050-01A	50W
11	LD-02U-0200-01B	200W	32	LD-15V-0100-01A	100W
12	LD-02V-0050-01B	50W	33	LD-15V-0150-01A	150W
13	LD-02V-0100-01B	100W	34	LD-15V-0200-01A	200W
14	LD-02V-0150-01B	150W	35	LD-19V-0050-01A	50W
15	LD-02V-0200-01B	200W	36	LD-19V-0100-01A	100W
16	LD-03V-0060-01B	60W	37	LD-19V-0150-01A	150W

17	LD-03V-0100-01B	100W	38	LD-19V-0200-01A	200W
18	LD-03V-0150-01B	150W	39	LD-20V-0050-01A	50W
19	LD-08V-0060-01B	60W	40	LD-20V-0100-01A	100W
20	LD-08V-0100-01B	100W	41	LD-20V-0150-01A	150W
21	LD-08V-0150-01B	150W	42	LD-01U-0200-01A	200W

Full tests are performed on the following models: LD-01U-0200-01A





IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.2 (0)	GENERAL TEST REQUIREMENTS		P
3.2 (0.3)	More sections applicable..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Section/s:	—
3.2 (0.5)	Components	(see Annex 1)	—
3.2 (0.7)	Information for luminaire design in light sources standards		—
3.2 (0.7.2)	Light source safety standard		—
	Luminaire design in the light source safety standard		P

3.4 (2)	CLASSIFICATION OF LUMINAIRES		P
3.4 (2.2)	Type of protection	Class I	P
3.4 (2.3)	Degree of protection	IP 67	P
3.4 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
3.4 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
3.4 (-)	Modes of installation of road or street lighting		—
	a) on a pipe	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	b) on a mast arm	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	c) on a post top	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	d) on span or suspension wires	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	e) on a wall	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—

3.5 (3)	MARKING		P
3.5 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
3.5 (3.3)	Additional information		P
	Language of instructions	English	P
3.5 (3.3.1)	Combination luminaires		N/A
3.5 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
3.5 (3.3.3)	Operating temperature		N/A
3.5 (3.3.5)	Wiring diagram		N/A
3.5 (3.3.6)	Special conditions		N/A
3.5 (3.3.7)	Metal halide lamp luminaire – warning		N/A
3.5 (3.3.8)	Limitation for semi-luminaires		N/A
3.5 (3.3.9)	Power factor and supply current		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.5 (3.3.10)	Suitability for use indoors		N/A
3.5 (3.3.11)	Luminaires with remote control		N/A
3.5 (3.3.12)	Clip-mounted luminaire – warning		N/A
3.5 (3.3.13)	Specifications of protective shields		N/A
3.5 (3.3.14)	Symbol for nature of supply	~	P
3.5 (3.3.15)	Rated current of socket outlet		N/A
3.5 (3.3.16)	Rough service luminaire		N/A
3.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
3.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
3.5 (3.3.19)	Protective conductor current in instruction if applicable		N/A
3.5 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
3.5 (3.3.21)	Non replaceable and non-user replaceable light sources information provided		P
3.5 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
3.5 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
3.5 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
3.5 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
3.5 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
3.5 (3.4)	Test with water	15s	P
	Test with hexane	15s	P
	Legible after test	Clearly visible	P
	Label attached	No be easily removable, No curling	P
3.5 (-)	Additional information in instruction leaflet		P
	a) Design attitude		P
	b) Weight		P
	c) Overall dimensions		P
	d) Maximum projected area if applicable		P
	e) Cross-sectional area of wires if applicable		N/A
	f) Suitability for indoors use		N/A
	g) Dimensions of the compartment		P
	h) Torque setting to be applied to bolts or screws		P



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

	i) Maximum mounting height		P
--	----------------------------	--	---

3.6 (4)	CONSTRUCTION		P
3.6 (4.2)	Components replaceable without difficulty		N/A
3.6 (4.3)	Wireways smooth and free from sharp edges		P
3.6 (4.4)	Lampholders		N/A
3.6 (4.4.1)	Integral lampholder		N/A
3.6 (4.4.2)	Wiring connection		N/A
3.6 (4.4.3)	Lampholder for end-to-end mounting		N/A
3.6 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
3.6 (4.4.5)	Peak pulse voltage		N/A
3.6 (4.4.6)	Centre contact		N/A
3.6 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
3.6 (4.4.8)	Lamp connectors		N/A
3.6 (4.4.9)	Caps and bases correctly used		N/A
3.6 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
3.6 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
3.6 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
3.6 (4.7)	Terminals and supply connections		P
3.6 (4.7.1)	Contact to metal parts		N/A
3.6 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
3.6 (4.7.3)	Terminals for supply conductors		P
3.6 (4.7.3.1)	Welded method and material		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
3.6 (4.7.4)	Terminals other than supply connection		P
3.6 (4.7.5)	Heat-resistant wiring/sleeves		N/A
3.6 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
3.6 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
3.6 (4.9)	Insulating lining and sleeves		N/A
3.6 (4.9.1)	Retainment		N/A
	Method of fixing :		N/A
3.6 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C) :		N/A
3.6 (4.10)	Double or reinforced insulation		N/A
3.6 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
3.6 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
3.6 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- lining in lampholder		N/A
3.6 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
3.6 (4.11)	Electrical connections and current-carrying parts		P
3.6 (4.11.1)	Contact pressure		P
3.6 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
3.6 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
3.6 (4.11.4)	Material of current-carrying parts		P
3.6 (4.11.5)	No contact to wood or mounting surface		P
3.6 (4.11.6)	Electro-mechanical contact systems		N/A
3.6 (4.12)	Screws and connections (mechanical) and glands		P
3.6 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		P
	Torque test: torque (Nm); part..... : 0.8		P
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
3.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		P
3.6 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lampholder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
3.6 (4.12.5)	Screwed glands; force (Nm)..... : 6.25		P
3.6 (4.13)	Mechanical strength		P
3.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)	0.7	P
	1) live parts		P



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	2) linings		N/A
	3) protection		P
	4) covers		P
3.6 (4.13.2)	Metal parts have adequate mechanical strength		N/A
3.6 (4.13.3)	Straight test finger	30N	P
3.6 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
3.6 (4.13.6)	Tumbling barrel		N/A
3.6 (4.14)	Suspensions, fixings and means of adjusting		P
3.6 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)..... :		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
3.6 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
3.6 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles..... :		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
3.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
3.6 (4.14.5)	Guide pulleys		N/A
3.6 (4.14.6)	Strain on socket-outlets		N/A
3.6 (4.15)	Flammable materials		P



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- glow-wire test 650°C	See Test Table 3.15 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
3.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
3.6 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	P
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
3.6 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
3.6 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
3.6 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
3.6 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
3.6 (4.18)	Resistance to corrosion		P
3.6 (4.18.1)	- rust-resistance		P
3.6 (4.18.2)	- season cracking in copper		N/A
3.6 (4.18.3)	- corrosion of aluminium		N/A
3.6 (4.19)	Igniters compatible with ballast		N/A
3.6 (4.20)	Rough service vibration		N/A
3.6 (4.21)	Protective shield		N/A
3.6 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
3.6 (4.21.3)	No direct path		N/A
3.6 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment..... :	See Test Table 3.15 (13.3.2)	N/A
3.6 (4.22)	Attachments to lamps not cause overheating or damage		N/A
3.6 (4.23)	Semi-luminaires comply Class II		N/A
3.6 (4.24)	Photobiological hazards		P
3.6 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
3.6 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778		—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 .. :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
3.6 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
3.6 (4.26)	Short-circuit protection		N/A
3.6 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
3.6 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
3.6 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage drop test, resistance < 0,05 Ω		N/A
3.6 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C) :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
3.6 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		N/A
3.6 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	At least one fixing means requiring use of tool		N/A
3.6 (4.31)	Insulation between circuits		N/A
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
3.6 (4.31.1)	SELV or PELV circuits		N/A
	Used SELV/PELV source		N/A
	Voltage ≤ ELV		N/A
	Insulating of SELV/PELV circuits from LV supply		N/A
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Plugs and socket-outlets does not have protective conductor contact		N/A
3.6 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
3.6 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
3.6 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
3.6 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
3.6 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan ≤ 2 W at rated voltage		N/A
3.6 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A
3.6.1 (-)	At least IP X3 or X5 respectively. IP	IP67	P
	Column-integrated luminaires:		N/A
	- parts below 2,5 m. IP		N/A
	- parts above 2,5 m. IP		N/A
3.6.2 (-)	Suspension on span wires		N/A
3.6.3 (-)	Means for attaching the luminaire or external parts to its support appropriate to the weight		N/A
3.6.3.1 (-)	Static load test		N/A
	- drag coefficient.....		N/A
	- loaded area (m ²).....		N/A
	- used load (N).....		N/A
	- measured deformation (cm/m)		N/A
	- no rotation		N/A
3.6.4 (-)	Adjustable lampholders		N/A
3.6.5 (-)	Luminaires installed above 5 m, glass covers shall be:		N/A
	a) glass that fractures into small pieces (test according to 3.6.5.1), or		N/A
	b) glass having a high impact shock resistance (test according to 3.6.5.2), or		N/A
	c) protected by any means to retain glass fragments		N/A
	For tunnel luminaires 3.6.5.1 apply		N/A
	Method of protection declared by the manufacturer		N/A
3.6.5.1 (-)	Protection by the use of glass that fractures into small pieces		N/A
	- number of particles is more than 40.....		N/A
3.6.5.2 (-)	Protection by the use of high impact resistant glass		N/A
3.6.5.2.1 (-)	Glass covers have high mechanical strength		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Test according IEC 62262 with test apparatus according IEC 60068-2-75 with impact energy of 5J on preconditioned sample		N/A
3.6.5.2.2 (-)	Glass covers not break into large pieces		N/A
	- test according 3.6.5.1, number of particles is more than 20		N/A
3.6.6 (-)	Connection compartment of column-integrated luminaire		N/A
	- provides adequate space		N/A
	- means for attachment		N/A
	- means for attachment of metal corrosion-resistant		N/A
3.6.7 (-)	Compliance with ISO standard or other		N/A
3.6.8 (-)	Doors of column-integrated luminaires:		N/A
	- corrosion-resistant		N/A
	- opening only possible for an authorized person		N/A
	- impact test 5 Nm		N/A
	- sample show no damage		N/A
3.6.9 (-)	Column-integrated luminaire:		N/A
	- dimension of the cable entry slot (mm)		N/A
	- cable path from the slot to the connection compartment (mm)		N/A
	- cable path free from obstruction that might cause abrasion of the cable		N/A

3.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
3.7 (11.2)	Creepage distances and clearances	See Table 3.7 (11.2)	P
	Impulse withstand category (Normal category II) (Category III Annex U, Table U.1)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
3.7 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 3.7 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with \hat{U}_{OUT} and $f_{U_{OUT}}$ according IEC 61347-1, clause 7.1, item w	See Test Table 3.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 3.7 (11.2) II	N/A
3.7 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 3.7 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 3.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 3.7 (11.2) II	N/A



IEC 60598-2-3

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

3.8 (7)	PROVISION FOR EARTHING		P
3.8 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 Ω..... :	0.010	P
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		P
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
3.8 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		P
3.8 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P
3.8 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
3.8 (7.2.6)	Protective earth terminal adjacent to mains terminals		P
3.8 (7.2.7)	Electrolytic corrosion of the protective earth terminal		P
3.8 (7.2.8)	Material of protective earth terminal		P
	Contact surface bare metal		P
3.8 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
3.8 (7.2.11)	Protective earthing core coloured green-yellow		P
	Length of earth conductor		P
3.8 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

3.9 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

3.9 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list..... :	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.10 (5)	EXTERNAL AND INTERNAL WIRING		P
3.10 (5.2)	Supply connection and external wiring		P
3.10 (5.2.1)	Means of connection : Supply cord		P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		P
3.10 (5.2.2)	Type of cable : See Annex 1		P
	Nominal cross-sectional area (mm ²) : See Annex 1		P
	Cables equal to IEC 60227 or IEC 60245		P
3.10 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
3.10 (5.2.5)	Type Z not connected to screws		N/A
3.10 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
3.10 (5.2.7)	Cable entries through rigid material have rounded edges		P
3.10 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
3.10 (5.2.9)	Locking of screwed bushings		N/A
3.10 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
3.10 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
3.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		P
3.10 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe	60N	P
	- pull test: 25 times; pull (N)	0.25Nm	P
	- torque test: torque (Nm)	<1.0mm	P
	- displacement ≤ 2 mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
3.10 (5.2.10.4)	Luminaire with/designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV $\leq 25V$ RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV $\leq 12V$ RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage $\leq 12V$ RMS/30V DC		N/A
	Pull test of 30N		N/A
3.10 (5.2.11)	External wiring passing into luminaire		P
3.10 (5.2.12)	Looping-in terminals		N/A
3.10 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
3.10 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
3.10 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
3.10 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.10 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
3.10 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
3.10 (5.3)	Internal wiring		P
3.10 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures	(see Annex 2)	N/A
	Green-yellow for protective earth only		P
3.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²)		N/A
	Insulation thickness		N/A
	Extra insulation added where necessary		N/A
3.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²)		P
3.10 (5.3.1.3)	Double or reinforced insulation for class II		N/A
3.10 (5.3.1.4)	Conductors without insulation		N/A
3.10 (5.3.1.5)	SELV/PELV current-carrying parts		N/A
3.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
3.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
3.10 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- cables with protective sheath		N/A
3.10 (5.3.4)	Joints and junctions effectively insulated		P
3.10 (5.3.5)	Strain on internal wiring		N/A
3.10 (5.3.6)	Wire carriers		N/A
3.10 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
3.10 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A
3.10.1 (-)	Cord anchorage if applicable		P
	- pull test: 25 times; pull (N)	60N	P
	- torque test: torque (Nm)	0.25Nm	P

3.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
3.11 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
3.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
3.11 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
3.11 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
3.11 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	- interrupted DC voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	- interrupted DC voltage (V)		N/A
	Class III luminaire only for connection to SELV		N/A
	Class III luminaire not provided with means for protective earthing		N/A
3.11 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	One pole insulated if required		N/A
3.11 (8.2.4)	Portable luminaire have protection independent of supporting surface		N/A
3.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
3.11 (8.2.6)	Covers reliably secured		P
3.11 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Other luminaires with capacitor > 0,1 μF (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

3.12 (12)	ENDURANCE TEST AND THERMAL TEST		P
3.12 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 3.13		—
3.12 (12.2)	Selection of lamps and ballasts		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied	(Control gear used see Annex 2)	—
3.12 (12.3)	Endurance test:		P
	a) mounting-position	As normal used	—
	b) test temperature (°C)	55	—
	c) total duration (h)	240	—
	d) supply voltage (V)	277*1.1	—
	d) if not equipped with control gear, constant voltage/current (V) or (A)	Integrated LED module	—
3.12 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
3.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
3.12 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
3.12 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	N/A
3.12 (12.6)	Thermal test (failed lamp control gear condition):		N/A
3.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
3.12 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
3.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		
3.12 (12.7.1)	Luminaire without temperature sensing control		N/A
3.12 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test	See Table 3.15 (13.2.1)	N/A
3.12 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Ball-pressure test	See Table 3.15 (13.2.1)	N/A
3.12 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
3.12 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link.....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions		—
	- highest measured temperature of fixing point/ exposed part (°C):		—
	Ball-pressure test:	See Table 3.15 (13.2.1)	N/A
3.12.1 (-)	Temperature reduction if for outdoor use only		P
3.12.2 (-)	(See above)		—
3.12.3 (-)	Glass covers used within the thermal limits declared by the glass manufacturer		P

3.13 (9)	RESISTANCE TO DUST AND MOISTURE		P
3.13.1 (-)	If IP > IP 20 the order of tests as specified in clause 3.12		P
3.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP	IP67	—
	- mounting position during test		—
	- fixing screws tightened; torque (Nm)		—
	- tests according to clauses.....		—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
3.13 (9.3)	Humidity test 48 h	25°C, 93%	P

3.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
3.14 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ)		—
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface		N/A
	- between current-carrying parts and metal parts of the luminaire		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity	>100MΩ	P
	- between live parts and mounting surface	>100MΩ	P
	- between live parts and metal parts	>100MΩ	P
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
3.14 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V)		P



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface..... :		N/A
	- between current-carrying parts and metal parts of the luminaire..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity :	1554V	P
	- between live parts and mounting surface :	1554V	P
	- between live parts and metal parts :	1554V	P
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
3.14 (10.3)	Touch current (mA)..... :		N/A
	Protective conductor current (mA)..... :	0.44	P

3.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
3.15 (13.2.1)	Ball-pressure test :	See Test Table 3.15 (13.2.1)	P
3.15 (13.3.1)	Needle-flame test (10 s)..... :	See Test Table 3.15 (13.3.1)	N/A
3.15 (13.3.2)	Glow-wire test (650°C) :	See Test Table 3.15 (13.3.2)	P
3.15 (13.4)	Proof tracking test (IEC 60112)..... :	See Test Table 3.15 (13.4)	N/A



IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
3.7 (11.2)	TABLE I: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	>6.0	3.0	11.1	>6.0	5.0	11.1
Working voltage (V)					277		—
PTI					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Pulse voltage or U_P if applicable (kV)					--		—
Supplementary information: Between L and N							
Distance 2:	B	>6.0	3.0	11.1	>6.0	5.0	11.1
Working voltage (V)					277		—
PTI					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Pulse voltage or U_P if applicable (kV)					--		—
Supplementary information: Between pins of fuse							
Distance 3:	B	>6.0	3.0	11.1	>6.0	5.0	11.1
Working voltage (V)					277		—
PTI					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Pulse voltage or U_P if applicable (kV)					--		—
Supplementary information: Between live parts and outer surface							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.



IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
3.7 (11.2)	TABLE II: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.15 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics		P
Allowed impression diameter (mm)		2	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)
Plastic lens	See ANNEX 1	125	1.0
Supplementary information:			

3.15 (13.3.1)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

3.15 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests					P	
Object/ Part No./ Material	Manufacturer/ trademark	Glow wire test (°C)					Verdict
		650		750		850	
		te	ti	te	ti		
Plastic lens	See ANNEX 1	/	/	0	0	/	P
Ignition of the specified layer placed underneath the test specimen (Yes/No)..... :						No	
Supplementary information:							

3.15 (13.4)	TABLE: Proof tracking test			N/A
Test voltage PTI		175 V		—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens		Verdict
Supplementary information:				



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1 TABLE: Critical components information						
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Supply cord	B	Zhongshan Guangli Electrical Appliance Co., Ltd.	H03VV-F	3*0.75mm ²	IEC/EN 50525-2-11	VDE 40048913
Internal wire	B	Dongguan Hongfuwei Cable Technology Co Ltd	1061	300V, Min. 24AWG, 80°C	UL 758	UL E316005
		Interchangeable	Interchangeable	300V, Min. 24AWG, 80°C	UL 758	UL
Fuse resistor	B	Shenzhen Great Electronics Co.,Ltd.	RXF	10ohm	--	VDE 40026608
Transformer	C	--	--	Class B	--	Tested with appliance
-Bobbin	B	CHANG CHUN PLASTICS CO LTD	T375HF	Phenolic, V-0, 130°C	--	UL E59481
-Magnet wire	B	HUIZHOU CITY DENGGAODA ELECTROTECH CO LTD	X UEWF	155°C	--	UL E253843
-Insulation tape	B	XINYU SHENGDAFENG ELECTRIC MATERIAL CO LTD	SDF-312	130°C	--	UL E317896
-Triple insulated wire	B	SHENZHEN KAIZHONG HEDONG NEW MATERIALS CO LTD	TIW-B for VDE; TIW-B* for UL	130°C	--	VDE 40038861 UL E357240
-Varnish	B	ZHUHAI CHANGXIAN NEW MATERIALS TECHNOLOGY CO LTD	E962	130°C	--	UL E335405
Plastic lens	C	--	--	--	--	Tested with appliance
LED	C	--	--	--	--	Tested with appliance
PCB	B	SHANDONG JIN BAO ELECTRONICS CO LTD	ZD-95(G)F1, ZD-90F, ZD-90FS	V-0, 130°C	UL 94, UL 796	UL E141940



IEC 60598-2-3

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component



IEC 60598-2-3							
Clause	Requirement + Test			Result - Remark		Verdict	
ANNEX 2	TABLE: Thermal tests of Section 12						P
	Type reference	:	LD-01U-0200-01A			—	
	Lamp used.....	:	Integrated LED module			—	
	Lamp control gear used	:	--			—	
	Mounting position of luminaire	:	As in normal use			—	
	Supply wattage (W)	:	--			—	
	Supply current (A)	:	--			—	
	Temperatures in test 1 - 4 below are corrected for ta (°C)	:	40			—	
	- abnormal operating mode	:	--			—	
1.13 (12.4)	- test 1: rated voltage	:	--			—	
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	:	277*1.1V			—	
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	:	--			—	
	Through wiring or looping-in wiring loaded by a current of A during the test	:	--			—	
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage	:	--			—	
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Input wire	25	-	56.0	-	90	-	-
Mounting surface	25	-	60.0	-	90	-	-
Objects lighted (0,1m)	25	-	72.1	-	90	-	-
Transformer winding	25	-	98.0	-	110	-	-
Transformer core	25	-	96.3	-	110		
PCB near LED	25	-	74.0	-	130		
Supplementary information:							



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm) :		N/A
	Torque (Nm) :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N) :		N/A
(14.4.8)	Without undue damage		N/A

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A



IEC 60598-2-3

Clause	Requirement + Test	Result - Remark	Verdict
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1)	TABLE: Contact resistance test / Heating tests										N/A
(15.6.3.2)	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										



IEC 60598-2-3											
Clause	Requirement + Test									Result - Remark	Verdict
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT			
IEC 60598-2-3			
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES			
Luminaires			
Part 2: Particular requirements			
Section 3: Luminaires for road and street lighting			
Differences according to.....:		EN 60598-2-3:2003 + A1:2011 used in conjunction with EN IEC 60598-1:2021 + A11:2022	
	CENELEC COMMON MODIFICATIONS (EN)		-
3.5 (3)	MARKING		P
3.5 (3.2.12)	Note 4 deleted		P
3.6 (4)	CONSTRUCTION		N/A
4.7 (4.11.6)	Electro-mechanical contact systems: electric strength test at 1 500 V		N/A
3.10 (5)	EXTERNAL AND INTERNAL WIRING		P
3.10 (5.2.2)	Cables equal to EN 50525 (all parts)		P
	Paragraph 2 deleted		P
	Replace table 5.1 – Supply cord		P
3.12 (12)	ENDURANCE TESTS AND THERMAL TESTS		N/A
3.12 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
(3.3)	DK: power supply cords of class I luminaires with label		N/A
(5.2.1)	CY, DK, FI, UK: type of plug		N/A
(5.2.18)	DK: socket-outlets		N/A
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings <i>(Decree of 30 December 2011 on safety regulations for the construction of high-rise buildings and their protection against fire and panic risks; Section VIII; Article GH 48, Lighting)</i> Glow-wire test for outer parts of luminaires:		N/A
	- 850°C for luminaires in stairways and horizontal travel paths		N/A
	- 650°C for indoor luminaires		N/A
	UK: Requirements according to United Kingdom Building Regulation		N/A

Attachment 1: Photos

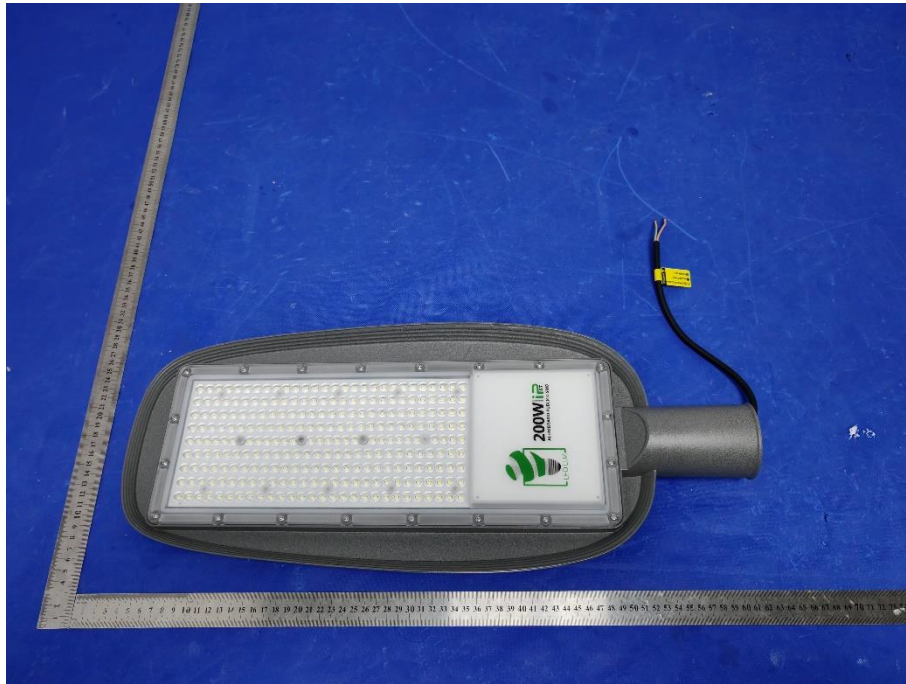


Figure 1 External view



Figure 2 External view



Figure 3 Internal view

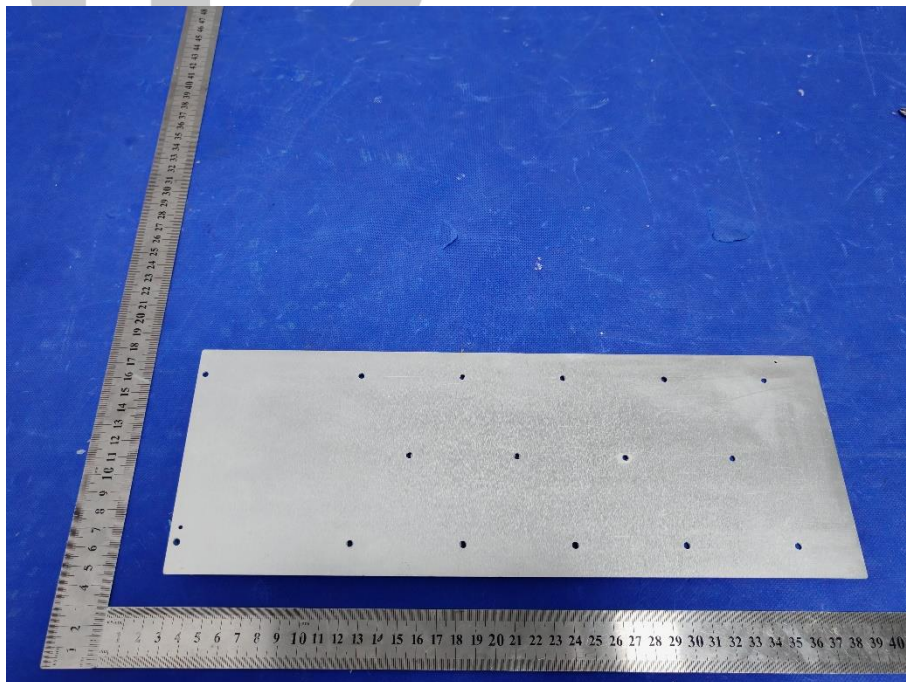


Figure 4 Internal view

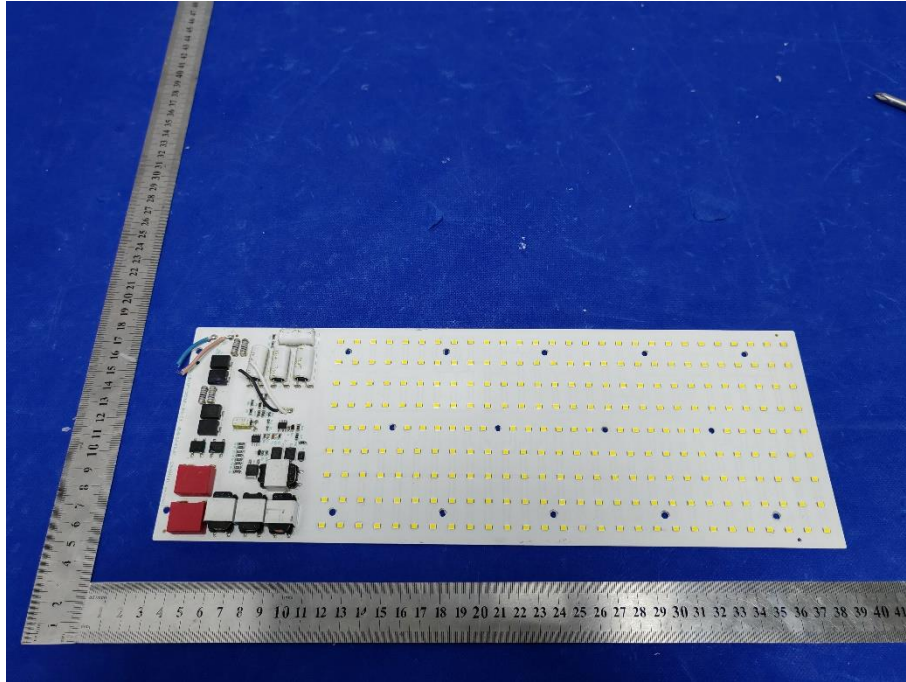


Figure 5 Internal view

END THE REPORT